

*Salt Spray Test*

*Intermittent Testing*

*Condensation Water Tests*

# Corrosion Testing Instruments Model 606

**Operation**

via

**JUMO DICON touch**



Fig.: Control Cabinet 606-1 with test chamber 400 l circular



Model 606-2 with 2 test chambers  
1000 l circular

testing equipment for quality management

**ERICHSEN**  
since 1910

Technical Description

**Versatile Instruments**

**2 test chambers operatable with 1 control cabinet**

**Tests in accordance with international standards**

## Purpose and application

Ferrous and non-ferrous metals are attacked continuously by humidity, acids, solutions, gases etc. It is therefore vitally important to choose the correct surface protection. There are many materials and qualities on the market and their properties must be properly assessed. Materials intended to prevent corrosion must be tested if failures are to be avoided. Furthermore the comparative quality control during production is of increasing importance. The best known processes employ spray vapour tests using various salt solutions as well as condensation water climates.

## Test principle

Aggressive solutions are turned into a vapour mist in accordance with the tests that are listed below. These vapours surround the specimens in the test chamber either continuously or in a cyclic manner. The corrosion resistance of the individual specimens is established on the basis of the difference in time before the first corrosive effects become apparent.

## Design

The ERICHSEN Corrosion Testing Instrument, Model 606, take full advantage of our wide experience in the construction of all kinds of testing equipment as well as of the information and worldwide feedback received from users. Made of impact resistant, eco-friendly polypropylene material each instrument forms a closed unit.

Our corrosion testing instruments can be compiled individually by the user.

For this purpose, two control cabinets are available, either for the equipment with **one test chamber (Model 606-1)** or as **double chamber device (Model 606-2)**.

Various test chamber sizes with test volume of 400 l, 1000 l or 2000 l can be selected regarding the requirements.

The test chambers (400 l and 1000 l) are available in circular and rectangular design.

The circular design provides even distribution of the salt solution vapour over the entire test zone.

When tests are required on larger working parts, it is often not possible to employ a test chamber of circular symmetry. For this reason, as an alternative, rectangular test chambers with a capacity of up to 2000 l (special dimensions upon request) can be supplied.

The scope of supply includes 3 specimen holder for weathering panels (per test chamber), with test capabilities of 18 test panels per specimen holder.



Specimen holder for weathering panels

## International Standards and Specifications

Continuous Salt Spray Tests			Intermittent Tests	Condensation Water Tests
DIN 40 046	ISO 1456	BS 3900/ F4	DIN 50 907	DIN EN ISO 6270-2
DIN EN ISO 9227	ISO 3768	NF X 41-002		DIN 50 958
DIN 50 907	ISO 3769	JIS Z 2371	DEF 1053 Meth. 24	DIN 55 991
DIN 53 167	ISO 3770		DEF 1053 Meth. 36	
	ISO 7253	SIS 184 190		ISO 3231
ASTM B 117	ECCA T 8			ISO 11503
ASTM B 287				ASTM D 2247
ASTM B 368	DEF 1053 Meth. 24			
ASTM D 1735	DEF 1053 Meth. 36			
MIL STD 202 D	MIL STD 810 C			

The **control cabinet 606-1** is equipped with a **JUMO DICON touch** for easy operation and monitoring of the test equipment as well as the necessary regulating and control instruments for monitoring the chamber temperature, the temperature of the humidifier, the spray pressure and the duration of the test.



The scope of supply includes an equipment for tests in heat damp atmospheres according to DIN EN ISO 6270-2 (CH) as well as two condensate receptacles.

The top of the test chamber dome is pneumatically opened and closed so that both hands can be used to lodge the specimens. A dosing pump serves for an infinitely variable adjustment to achieve optimum consumption of spray solution. The large storage tank for approx. 200 l salt solution allows continuous testing without attention over a period of up to a week. A circulation pump for mixing the salt solution in the storage tank is permanently installed in the lower part of the control unit.

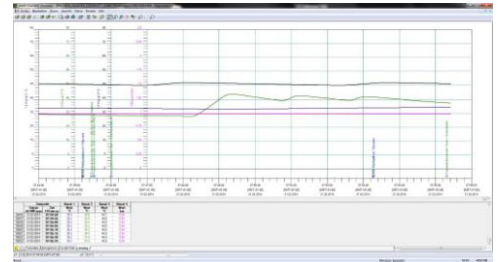
Constructed similarly to the control cabinet 606-1, the **control cabinet 606-2 (for connection of two test chambers)** is equipped with two dosing pumps and two circulation pumps. There are two integrated storage reservoirs for spraying liquid (each 150 l). The package includes four condensate receptacles.



Condensate receptacles

## Accessories (optional)

- Software JUMO PCC/PCA consisting of analysis software and communication software as well as a „Standard Online Visualization“ called with a conventional browser (prerequisite: operating system Microsoft Windows and Silverlight).







- Specimen holders for bulky parts
- Wastewater pumpout unit
- Compressed air maintenance unit
- Water

For further details and accessories please refer to our price list no. 606.






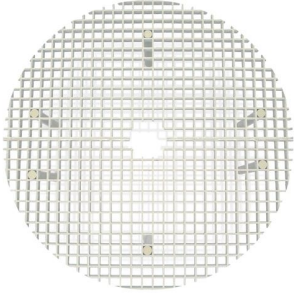
## Technical Data

Power supply	400 V / 3AC, N, PE 50 Hz (other voltages on request)
Consumption	
400 l test chamber	approx. 3820 VA
1000 l test chamber	approx. 4320 VA
2000 l test chamber	approx. 5320 VA
Compressed air connection	
Air pressure	5 - 7 bar
Air consumption	15 l/min at 6 bar
Water pipe connection	
Pressure	2 - 6 bar
Test temperature range	from ambient temperature up to +50 °C
Floor load of the test chamber	max. approx. 300 kg (special versions on request )
Capacity of the test chamber	
400 l test chamber	approx. 100 test panels
1000 l test chamber	approx. 180 test panels
2000 l test chamber	approx. 400 test panels (depending on the shape)

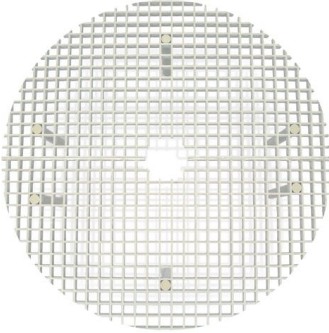


## Order Information

Figure	Ord.-No.	Description
<b>Control Cabinets</b>		
	20560031	<p><u>Control cabinet 606-1</u>, equipped with JUMO DICON touch, for connection of an optional ordered test chamber</p> <p><i>(a subsequent installation of a second test chamber is not possible!)</i></p> <p>Dimensions: approx. 1000 x 800 x 975 mm (W x D x H) Net weight: approx. 110 kg</p>
	20570031	<p><u>Control cabinet 606-2</u>, equipped with JUMO DICON touch, for connection of <u>two</u> optional ordered test chambers</p> <p>Dimensions: approx. 1430 x 800 x 975 mm (W x D x H) Net weight: approx. 140 kg</p>
<b>Test Chambers</b>		
	20060032	<p>Test chamber, <u>circular</u> design, 400 l test chamber volume</p> <p>Dimensions: approx. 1000 x 1100 x 2000 mm (W x D x H - open)</p> <p>Dimensions (inside): approx. 900 mm Ø x 650 mm</p> <p>Net weight: approx. 85 kg</p>
	20100032	<p>Test chamber, <u>rectangular</u> design, 400 l test chamber volume</p> <p>Dimensions: approx. 1000 x 1020 x 1800 mm (W x D x H - open)</p> <p>Dimensions (inside): approx. 780 x 770 x 670 mm (W x D x H)</p> <p>Net weight: approx. 100 kg</p>
	20050032	<p>Test chamber, <u>circular</u> design, 1000 l test chamber volume</p> <p>Dimensions approx. 1300 x 1400 x 2250 mm (W x D x H - open)</p> <p>Dimensions (inside): approx. 1200 mm Ø x 700 mm</p> <p>Net weight: approx. 110 kg</p>

Test Chambers		
Figure	Ord.-No.	Description
	20090032	<p>Test chamber, <u>rectangular</u> design, 1000 l test chamber volume</p> <p>Dimensions: approx. 1820 x 1000 x 1900 mm (W x D x H - open)</p> <p>Dimensions (inside): approx. 1500 x 770 x 670 mm (W x D x H)</p> <p>Net weight: approx. 150 kg</p>
	20490032	<p>Test chamber, <u>rectangular</u> design, 2000 l test chamber volume</p> <p>Dimensions: approx. 3000 x 1000 x 1900 mm (W x D x H - open)</p> <p>Dimensions (inside): approx. 2700 x 770 x 670 mm (W x D x H)</p> <p>Net weight: approx. 280 kg</p>
Accessories		
	04640017	<p><u>Specimen Holder for Test Panels</u> to supplement the three holders supplied as standard with the basic apparatus (18 test panels/holder)</p>
	02300132	<p><u>Specimen Holder for Bulky Parts</u> for holding larger finished parts, consisting of 4 upright tubes with holes and 8 support rails</p>
	21700132	<p><u>Sample Holder Rack (height-adjustable)</u> for test chamber in rectangular design; <u>without</u> sample rods and S-hooks (chamber volume 400 l = 1 rack / chamber volume 1000 l = 2 racks / Chamber volume 2000 l = 3 racks possible)</p> <p>Dimensions: approx. 740 x 670 x 650 mm (W x D x H)</p>

Accessories		
Figure	Ord.-No.	Description
	21740132	<u>Sample Rods (Ø 25 mm)</u> Set per 5 pieces suitable for sample holder rack (Ord.-No. 21700132)
	21740232	<u>Sample Rods (Ø 12 mm)</u> Set per 5 pieces suitable for sample holder rack (Ord.-No. 21700132)
	21730132	<u>Specimen Holder (horizontally)</u> suitable for sample holder rack (Ord.-No. 21700132)  (23 test panels /holder)
	780103541	<u>S-Hooks</u> suitable for sample rods (Ø 12 mm) (per 100 pieces)
	21990132	<u>Samples Grid</u> floor grid made of fiberglass with 4 height-adjustable feet, mesh spacing 40 x 40 mm, suitable for test chambers in rectangular design (chamber volume 400 l = 1 grid / chamber volume 1000 l = 2 grid / chamber volume 2000 l = 3 grid possible)  Dimensions: (W x D) 689 x 765 mm
	21990232	<u>Sample Grid (Ø 84 cm)</u> 2-piece floor grid made of fiberglass for receiving samples, with 6 feet, suitable for test chambers in circular design with 400 l test volume  (1 grid possible)

## Accessories

Figure	Ord.-No.	Description
	21990332	<p><u>Sample Grid (Ø 115 cm)</u> 2-piece floor grid made of fiberglass for receiving samples, with 6 feet, suitable for test chambers in <u>circular</u> design with 1000 l test volume</p> <p>(1 grid possible)</p>
	09940132	<p><u>Wastewater Pumpout Unit</u> for use in wastewater disposal below the flood level, if there is no floor drain available</p>
	<p>01590132</p> <p>01590232</p>	<p><u>Water deionizer behropur® B10dN</u> max. flow rate 300 l/h</p> <p><u>Water deionizer behropur® B22dN</u> max. flow rate 500 l/h</p>

The right of technical modifications is reserved.

**Further Corrosion Test Instruments supplied by ERICHSEN:**

### **Humidity Cabinet HYGROTHERM 519 / 529**

for humidity tests in accordance with international standards,  
with a semi-automatic control system or in fully automatic version (519/519 Smart)  
or consisting of a control unit with a separate test chamber (529)

### **Accelerated Weathering Instrument BANDOL WHEEL® 532**

in a compact design for acceleration of natural weathering,  
optional for „dry“ or „wet/dry“ weathering cycles

### **Corrosions Testing Apparatus (compact design) for Salt Spray and Condensation Water Tests , Model 606-Basic**

rectangular version, with 400 l, 1000 l or 2000 l test chamber capacity

### **Corrosions Testing Apparatus (compact design) for Alternating Tests, Model 608-Basic**

e.g. in accordance with VDA 621-415 or VW Specification  
ectangular version, with 400 l, 1000 l or 2000 l test chamber capacity

### **Corrosions Testing Apparatus for Alternating Tests, Model 608**

e.g. in accordance with VDA 621-415 or VW Specification  
with 400 l, 1000 l or 2000 l test chamber capacity

### **Corrosion Test Instrument CORROTHERM 610**

simple, inexpensive test instrument, approx. 400 l or 1000 l volume

### **Corrosion Test Instrument CORROTHERM 610ePLUS**

semi automatic version with programmable Micro Controller and LCD,  
with 400 l or 1000 l test chamber capacity

### **Corrosion Testing Instrument to carry out Tests in Altering Climates as well as various Salt Spray and Condensation Water Tests, Model 618 incl. Interface for connecting an Air Conditioning Unit**

with 400 l, 1000 l or 2000 l test chamber capacity

### **SOLARBOX, Model 522**

Light exposure test apparatus, with optional microprocessor controls  
and programmable flooding system as well as interface RS232C

***For the specimen preparation we recommend the following instruments/tools:***

**Scratching Tool acc. to van Laar , Model 426**

**SCRATCHMARKER 427**

**Automatic Milling Machine CORROCUTTER Smart 638**

**Test Panel Scratcher CORROCUTTER 639**

**Scratch Stylus acc. to Sikkens, Model 463**

**Multi-Cross Cutter, Model 295/III**

**SledCutter 295/XVII**

***Please ask for our detailed leaflets and price lists.***